

www.acobuildline.com.au

www acobuildline co nz

INSTALLATION DRAWING

ACO Polycrete Pty Ltd 1300 765 226 sales@acoaus.com.au

Screed


DRG #:

Concrete slab

IN003 SLOTCHANNEL, SUSPENDED SLAB, GROUND SLAB, TILE FLOORING

SlotChannel Reinforced concrete (detail by others) Solid edge Sealant, typically 10mm x 10mm Tile on screed (by others) Grout 4.7

Outlet Unit

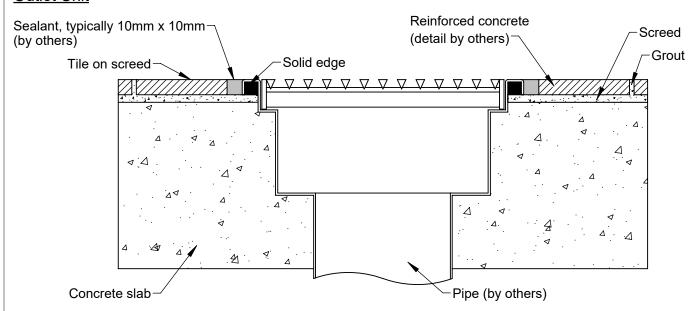

1.. These details only provide a practical reference. ACO recommends designers and installers check local legislative standards and practices, or seek specialised engineering advice.

Specification Clause

The floor channels are to be ACO Stainless SlotChannel grade 304/316 stainless steel as supplied by ACO Pty Ltd. All components used within the scope of the systems are shown on Drawing Number/s:

All work should be carried out strictly in accordance with the manufacturer's instructions and the installation details set out on Drawing Number/s:

All components are to be supplied with constant depth channels with solid edge.

The channels shall have a continuous slot of 20mm and overall depth and length, position, nominal size of outlet as specified on Drawing Number/s:

Grates for outlet unit are to be part number *.